

MAXCREATE®
EMPOWERING SOLUTIONS

Tile Adhesive | Epoxy Grout



IS : 15477

CM/L8200169013

MAXCREATE[®]

EMPOWERING SOLUTIONS

Tile Adhesive | Epoxy Grout



Our Company is registered with MSME, GeM Portal and has IEC for Exports. Our brand **"MAXCREATE"** along with LOGO are trademark registered. Company is resolved to ensuring environment-friendly processes and systems. We are an organization that is constantly innovating and upgrading to match international benchmarks in quality.



At MAXCREATE, we firmly believe that a solid pillar of trust between the company and its investors, customers, partners, and employees is paramount for any business.

We aim to serve the needs of our clients and create value for our Distributors, Dealers, Applicators and End Users by becoming the most efficient and innovative Construction Chemicals Company.

We invest in building and maintaining lasting relationships.



An innovation-led organization dedicated to supplying and manufacturing high-performance chemicals for the construction industry. Our objective is to help build sturdy and reliable future-ready structures and we aim to attain excellence beyond the best by our endeavors.



OUR PHILOSOPHY

MAXCREATE, is constantly working and striving to attain newer, higher levels of excellence. We believe in marching beyond the finish line and setting a higher threshold of excellence with every win.

Ensuring an end-to-end customer-oriented satisfactory experience, MAXCREATE, is focused on providing par excellence products.



OUR CORE VALUES

- ✓ Transparency with our clients, our employees, and everyone we associate with
- ✓ Strict adherence to delivery commitments
- ✓ Strong ethical standards for conducting our business
- ✓ Immense value and respect for our business relationships
- ✓ Complete transparency in all our dealings
- ✓ Equal opportunities for all our employees
- ✓ Constantly pushing boundaries to attain newer levels of excellence



OUR VISION

Our vision is to be an innovation and technology-led company for all construction needs, known for our supreme quality product line throughout the country, aligned with the **Make in India** focus of increasing domestic production.



OUR MISSION

Our Mission is to bring together a sturdy infrastructure of brilliant minds, concrete work ethics, and transparency, to deliver the best experiences and products to our clients. We are in tune with India's **Make in India** vision and strive to build valuable client relationships.



QUALITY ASSURED



ENVIRONMENT FRIENDLY




INNOVATION DRIVEN



CUSTOMER FOCUSED



BUILDING A STRONGER FUTURE

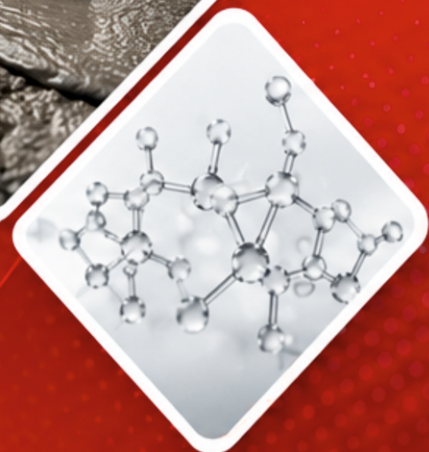

Certifications



Certificate of Registration

This is to certify that

MAXCREATE INDUSTRIES

REGISTERED OFFICE:- 4/9/1, NAYAPURA BEHIND NEW SIYAGANJ,
INDORE, MADHYA PRADESH - 452007, INDIA

has been independently assessed by QRO
and is compliant with the requirement of:

ISO 9001:2015

Quality Management System

For the following scope of activities:

MANUFACTURER OF TILE ADHESIVE, STONE ADHESIVE, EPOXY, AAC BLOCK JOINTING MORTAR, REDY MIX PLASTER AND WATER PROOFING PRODUCT MANUFACTURER OF TILE ADHESIVE, STONE ADHESIVE, EPOXY, AAC BLOCK JOINTING MORTAR, REDY MIX PLASTER AND WATER PROOFING PRODUCTS.S.

Date of Certification: 16th November 2023
1st Surveillance Audit Due: 15th November 2024

2nd Surveillance Audit Due: 15th November 2025
Certificate Expiry: 15th November 2026

Certificate Number: 305023111611Q



Head of Certification

Validity of this certificate is subject to annual surveillance audits to be done successfully on or before 365 days from date of the audit.
(In case surveillance audit is not allowed to be conducted: this certificate shall be suspended / withdrawn).

The Validity of this certificate can be verified at www.qrocert.org
This certificate of registration remains the property of QRO Certification LLP, and shall be returned immediately upon request.

India Office : QRO Certification LLP

142, 11nd Floor, Avtar Enclave, Near Paschim Vihar West Metro Station, Delhi-110063, (INDIA)
Website : www.qrocert.org, E-mail : info@qrocert.org



भारतीय मानक ब्यूरो
उपभोक्ता मामले, खाद्य एवं सार्वजनिक वितरण मंत्रालय
भारत सरकार
BUREAU OF INDIAN STANDARDS
Ministry of Consumer Affairs, Food & Public Distribution
Government of India

Our Ref: CM/L- 8200169013

Dated: 02/07/2024

Subject: Grant of BIS Product Certification Licence No. 8200167910 as per IS 15477:2019

मेसर्स मैक्सक्रिएट इंडस्ट्रीज
Dear Sir,

With reference to your application, we are pleased to inform you that the Certification Marks Licence has been granted to you to use the Standard Mark in respect of the followings:

Product: - Adhesive for use with Ceramic, Mosaic and Stone Tiles

Scope: Type I, Deformability S1, Slip Resistance T, use for vertical & other than vertical applications
IS 15477:2019

The licence is granted on the explicit condition that you will mark entire/substantial production which conforms to the Indian Standards.

2. The number assigned to this Licence is CM/L- 8200167910 which has been made operative from 16-06-2024 and is valid up to 15-06-2025. The licence number shall invariably be referred to in your future correspondence.

3. Further, you should cover the entire production under scope of licence with Standard Mark and maintain conformity to the relevant Indian Standards. In addition, you should display the BIS product certification licence prominently at your premises and also mention the BIS product certification licence held by you in your commercial advertisements.

4. According to Sub-Paragraph (1) & (3) of Paragraph 5 of Scheme-I of Schedule-II under Bureau of Indian Standards (Conformity Assessment) Regulations, 2018, the annual licence fee of Rs.1000.00 and the marking fee for use of Standard Mark as per Annexure-I of Scheme-I of BIS (Conformity Assessment) Regulations, 2018 is payable by you with effect from 16-06-2024 for the period of validity of the licence in advance.

5. Minimum Marking fee stipulated in Annexure-I of Scheme-I of BIS (Conformity Assessment) Regulations, 2018 is payable by you regardless of the fact whether you actually mark your product or not with the Standard Mark. Our Receipt No. AA82PC2024000334 dated 22-05-2024 for the licence fee and the minimum marking fee for the first operative period is already issued.

भोपाल शाखा कार्यालय : 'मानकालय', ई-5, अरेरा कॉलोनी, बित्तन मार्केट, भोपाल - 462016 (म.प्र.)
BHOPAL BRANCH OFFICE : 'Manakalaya', E-5, Arera Colony, Bittan Market, Bhopal - 462016 (M.P.)
दूरभाष / Tel.: 0755-2423449, 2423452, 2423454, 2420493, 2442550 फैक्स/Fax : 0755-2423451
ई-मेल/E-mail : bpbo@bis.gov.in वेबसाइट/Website : www.bis.gov.in

मुख्यालय : मानक भवन, 9, बहादुरशाह जफर मार्ग, नई दिल्ली - 110002
Headquarter : Manak Bhavan, 9, Bahadur Shah Zafar Marg, New Delhi - 110002



सूक्ष्म, लघु और मध्यम उद्यम मंत्रालय
MINISTRY OF
MICRO, SMALL &
MEDIUM ENTERPRISES



CERTIFICATE

ZED BRONZE

under MSME Sustainable (ZED) Certification Scheme
awarded to

MAXCREATE INDUSTRIES

UNIT NAME

Flat No:- 12/1 Bajrag pura, Building:- sukhliya, Road/Street:- sanwer road industrial area,
Village/Town:- gram suganda nagar, Block:- sanwer road, City:- indore, INDORE, MADHYA
PRADESH-452015

UNIT ADDRESS

23-Manufacture of other non-metallic mineral products

CODE (AS PER NIC-2008)

UDYAM-MP-23-0044263

UDYAM REGISTRATION NUMBER

Issued on :
September 26, 2025

Certificate Validity :
Three years from the date of issue



Certificate No. 26092025_562113

This Certificate has been awarded after fulfilling all relevant requirements as laid down in the MSME Sustainable (ZED) Certification Scheme Guidelines for this Certification Level.
Award of this Certificate does not substitute any legal requirement needed for setting up or operating an MSME Unit.



TRUEFIX TILE ADHESIVE GREY

TILE ADHESIVE –GREY is a polymer modified cement based high performance tile adhesive designed for fixing small and medium format tiles of all types of vitrified/ceramic tiles. It is suitable for interior horizontal/ vertical (up to 8 feet) applications.



FEATURES / ADVANTAGES

- Single component ready to mix and easy to use.
- Excellent adhesion with dry substrate.
- It provides excellent bond strength and flexibility.
- No curing required.

Specifications :IS 15477-2019. Type 1 T EN 12004-C1T

55 to 60 sq. ft / 20kg. bags with 3mm. bad thickness (6mm x 6mm notch trowel)

20 kg.

TECHNICAL SPECIFICATION

SL No.	Parameter	Unit	Requirement	Observed Value
1.	Tensile adhesion strength-28 days			
1a	Dry Condition	N/mm ²	0.5	0.52 - 0.60
2b	Wet Condition	N/mm ²	-	-
2.	Shear adhesion strength-28 days			
2a	Dry Condition	N/mm ²	1.0	1.02 - 1.05
2b	Heat ageing Condition	N/mm ²	-	-
2c	Wet Condition	N/mm ²	-	-
3.	Open time	Minutes	20	20
4.	Adjustable time	Minutes	15	15
5.	Slip resistance	mm	<0.5	0.35-0.40
6.	pot life	Hours	2	2





TRUEFIX TILE ADHESIVE GREY PLUS

TILE ADHESIVE –GREY PLUS is a polymer modified cement based high performance tile adhesive designed for fixing medium format tiles of all types of vitrified/ceramic. It is suitable for interior horizontal/ vertical (up to 8 feet) applications.



FEATURES / ADVANTAGES

- Single component ready to mix and easy to use.
- Low porosity compatibility.
- Water resistant/sagging resistant.
- Excellent adhesion with dry substrate.
- No curing required.

Specifications :IS 15477-2019. Type 1 T EN 12004-C1T

COVERAGE

55 to 60 sq. ft / 20kg. bags with 3mm. bad thickness (6mm x 6mm notch trowel)

PACKAGING

20 kg.

TECHNICAL SPECIFICATION

SL No.	Parameter	Unit	Requirement	Observed Value
1.	Tensile adhesion strength-28 days			
1a	Dry Condition	N/mm ²	0.5	0.75 - 0.85
2b	Wet Condition	N/mm ²	-	-
2.	Shear adhesion strength-28 days			
2a	Dry Condition	N/mm ²	1.0	1.20 - 1.30
2b	Heat ageing Condition	N/mm ²	-	-
2c	Wet Condition	N/mm ²	-	-
3.	Open time	Minutes	20	20
4.	Adjustable time	Minutes	15	15
5.	Slip resistance	mm	<0.5	0.35-0.40
6.	pot life	Hours	2	2





TRUEFIX TILE ADHESIVE SILVER

TILE ADHESIVE –SILVER GREY is a polymer modified cement based high performance tile adhesive designed for fixing medium format tiles of all types of vitrified/ceramic, clay, terracotta and stone tiles. It is suitable for interior horizontal/ vertical (up to 8 feet) applications.

FEATURES / ADVANTAGES

- Single component ready to mix and easy to use.
- Enhanced durability.
- Low porosity compatibility.
- Water resistant/sagging resistant.
- Excellent adhesion with dry substrate.
- It provides excellent bond strength and flexibility.
- No curing required.
- Ideal for both interior and exterior applications.

Specifications :IS 15477-2019. Type 2 T EN 12004-C1TE

COVERAGE

55 to 60 sq. ft / 20kg. bags with 3mm. bed thickness (6mm x 6mm notch trowel)

PACKAGING

20 kg.



TECHNICAL SPECIFICATION

SL No.	Parameter	Unit	Requirement	Observed Value
1.	Tensile adhesion strength-28 days			
1a	Dry Condition	N/mm ²	1	1.15 -1.25
2b	Wet Condition	N/mm ²	1	1.05 -1.20
2.	Shear adhesion strength-28 days			
2a	Dry Condition	N/mm ²	1.25	1.29 - 1.36
2b	Heat ageing Condition	N/mm ²	1	1.15
2c	Wet Condition	N/mm ²	1	1.16
3.	Open time	Minutes	20	20
4.	Adjustable time	Minutes	15	15
5.	Slip resistance	mm	<0.5	0.35-0.40
6.	pot life	Hours	2	2





TRUEFIX TILE ADHESIVE WHITE SILVER

TILE ADHESIVE –SILVER WHITE is a polymer modified cement based high performance tile adhesive designed for fixing medium and large format tiles of all types of vitrified/ceramic, clay, terracotta, glass mosaic and all stone tiles. It is suitable for interior/exterior under shade horizontal/ vertical (up to 8 feet) applications.



FEATURES / ADVANTAGES

- Single component ready to mix and easy to use.
- Low porosity compatibility and Enhanced durability..
- Water resistant/sagging resistant.
- Excellent adhesion with dry substrate.
- It provides excellent bond strength and flexibility.
- No curing required.
- Ideal for both interior and exterior applications, including wet or submerged areas like showers/Bathroom.
- Ideal for use with light colored or translucent tiles to prevent discoloration and maintain clean look.

Specifications :IS 15477-2019, Type 2 T EN 12004-C1TE

COVERAGE

55 to 60 sq. ft / 20kg. bags with 3mm. bad thickness (6mm x 6mm notch trowel)

PACKAGING

20 kg.

TECHNICAL SPECIFICATION

SL No.	Parameter	Unit	Requirement	Observed Value
1.	Tensile adhesion strength-28 days			
1a	Dry Condition	N/mm ²	1	1.20 -1.30
2b	Wet Condition	N/mm ²	1	1.05 -1.20
2.	Shear adhesion strength-28 days			
2a	Dry Condition	N/mm ²	1.25	1.30 - 1.40
2b	Heat ageing Condition	N/mm ²	1	1.15
2c	Wet Condition	N/mm ²	1	1.16
3.	Open time	Minutes	20	20
4.	Adjustable time	Minutes	15	15
5.	Slip resistance	mm	<0.5	0.35-0.40
6.	pot life	Hours	2	2





TRUEFIX TILE ADHESIVE GOLD

TILE ADHESIVE –GOLD GREY is a polymer modified cement based high performance tile adhesive designed for fixing large format tiles of all types of vitrified/ceramic, clay, terracotta, glass mosaic and all stone tiles. It is suitable for interior/exterior horizontal/ vertical (up to 10 feet) applications.



FEATURES / ADVANTAGES

- Single component ready to mix and easy to use.
- Superior bond strength, excellent water and frost resistance.
- Sag resistance formula for vertical application.
- Offers long-lasting performance and stability for exterior cladding and facades.
- Excellent adhesion with dry and wet substrate.
- Weather tolerance for high pressure areas.
- No curing required.

Specifications :IS 15477-2019. Type 3 'T' EN 12004-C2TE

COVERAGE

55 to 60 sq. ft / 20kg. bags with 3mm. bad thickness (6mm x 6mm notch trowel)

PACKAGING

20 kg.

TECHNICAL SPECIFICATION

SL No.	Parameter	Unit	Requirement	Observed Value
1.	Tensile adhesion strength-28 days			
1a	Dry Condition	N/mm ²	1.5	1.60 - 1.70
2b	Wet Condition	N/mm ²	1	1.20 - 1.30
2.	Shear adhesion strength-28 days			-
2a	Dry Condition	N/mm ²	1.5	1.70 - 1.80
2b	Heat ageing Condition	N/mm ²	1	1.20 - 1.30
2c	Wet Condition	N/mm ²	1	1.25-1.30
3.	Open time	Minutes	20	20
4.	Adjustable time	Minutes	15	15
5.	Slip resistance	mm	<0.5	0.35-0.40
6.	pot life	Hours	2	2





TRUEFIX TILE ADHESIVE WHIT

TILE ADHESIVE –GOLD WHITE is a polymer modified cement based high performance tile adhesive designed for fixing large format tiles of all types of vitrified/ceramic, clay, terracotta, glass mosaic and all stone tiles. It is suitable for interior/exterior horizontal/ vertical (up to 10 feet) applications.is suitable for interior/exterior horizontal/ vertical (up to 10 feet) applications.

FEATURES / ADVANTAGES

- Single component ready to mix and easy to use.
- Designed to provide a strong and reliable bond for tiles, especially on exterior walls.
- Offers long-lasting performance and stability for exterior cladding and facades.
- Its weather-resistant properties ensure the tiled surface has a longer lifespan in challenging outdoor environments
- Excellent adhesion with dry and wet substrate.
- Supports diverse materials: Can be used for fixing a wide variety of materials, from ceramic tiles to all natural stone tiles.
- No curing required.

Specifications :IS 15477-2019. Type 3 'T' EN 12004- C2TE

COVERAGE

55 to 60 sq. ft / 20kg. bags with 3mm. bad thickness (6mm x 6mm notch trowel)

PACKAGING

20 kg.

TECHNICAL SPECIFICATION

SL No.	Parameter	Unit	Requirement	Observed Value
1.	Tensile adhesion strength-28 days			
1a	Dry Condition	N/mm ²	1.5	1.60 - 1.70
2b	Wet Condition	N/mm ²	1	1.30 - 1.45
2.	Shear adhesion strength-28 days			-
2a	Dry Condition	N/mm ²	1.5	1.75 - 1.85
2b	Heat ageing Condition	N/mm ²	1	1.25 - 1.35
2c	Wet Condition	N/mm ²	1	1.30-1.40
3.	Open time	Minutes	20	20
4.	Adjustable time	Minutes	15	15
5.	Slip resistance	mm	<0.5	0.35-0.40
6.	pot life	Hours	2	2





TRUEFIX TILE ADHESIVE DIAMOND

TILE ADHESIVE –DIAMOND WHITE is a polymer modified cement based high performance tile adhesive designed for fixing large format tiles of all types of vitrified/ceramic, clay, terracotta, glass mosaic and all stone tiles. It is suitable for interior/exterior/underwater on horizontal/vertical (up to 10 feet) applications.



FEATURES / ADVANTAGES

- **High adhesion strength:** Engineered to provide a strong and reliable bond for tiles, especially on exterior walls.
- **Weather and water resistance:** Formulated to withstand harsh outdoor conditions, including rain, temperature fluctuations, and moisture.
- **Durability:** Offers long-lasting performance and stability for exterior cladding and facades.
- **Long service life in challenging outdoor environments.**
- **Handles high pressure.**

Specifications :IS 15477-2019, Type 4 'T' EN 12004- C2TE S1

COVERAGE

55 to 60 sq. ft / 20kg. bags with 3mm. bad thickness (6mm x 6mm notch trowel)


PACKAGING

20 kg.

TECHNICAL SPECIFICATION

SL No.	Parameter	Unit	Requirement	Observed Value
1.	Tensile adhesion strength-28 days			
1a	Dry Condition	N/mm ²	1.5	1.70 - 1.85
2b	Wet Condition	N/mm ²	1	1.35 - 1.45
2.	Shear adhesion strength-28 days			
2a	Dry Condition	N/mm ²	1.5	1.75 - 1.85
2b	Heat ageing Condition	N/mm ²	1	1.25 - 1.35
2c	Wet Condition	N/mm ²	1	1.30-1.40
3.	Open time	Minutes	20	20
4.	Adjustable time	Minutes	15	15
5.	Slip resistance	mm	<0.5	0.35-0.40
6.	pot life	Hours	2	2



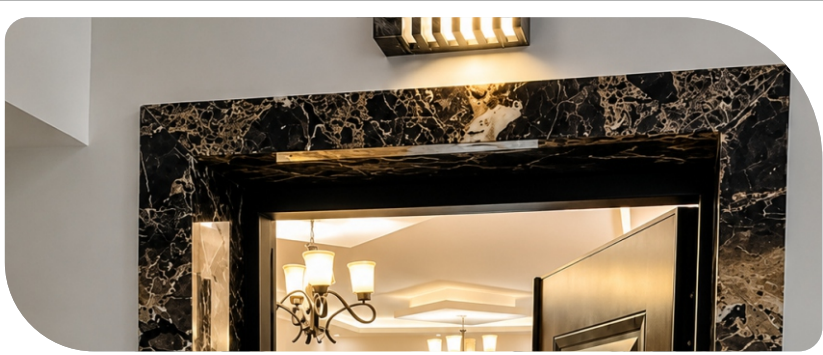

TRUEFIX TILE ADHESIVE PLATINUM

TILE ADHESIVE –PLATINUM WHITE is a polymer modified cement based high performance tile adhesive designed for fixing large format tiles of all types of vitrified/ceramic, clay, terracotta, glass mosaic and all stone tiles. It is suitable for demanding interior/exterior/under water on horizontal/ vertical (up to 10 feet) applications..



FEATURES / ADVANTAGES

- **High adhesion strength:** Engineered to provide a strong and reliable bond for tiles, especially on exterior walls.
- **Weather and water resistance:** Formulated to withstand harsh outdoor conditions, including rain, temperature fluctuations, and moisture.
- **Durability:** Offers long-lasting performance and stability for exterior cladding and facades.
- **Long service life:** Its weather-resistant properties ensure the tiled surface has a longer lifespan in challenging outdoor environments.
- **Handles high pressure:** Appropriate for areas subjected to high pressure, such as exterior facades.

Specifications :IS 15477-2019, Type 4 'T' EN 12004- C2TE S2

COVERAGE
55 to 60 sq. ft / 20kg. bags with 3mm. bed thickness (6mm x 6mm notch trowel)

PACKAGING
20 kg.

TECHNICAL SPECIFICATION

SL No.	Parameter	Unit	Requirement	Observed Value
1.	Tensile adhesion strength-28 days			
1a	Dry Condition	N/mm ²	1.5	1.90 - 1.98
2b	Wet Condition	N/mm ²	1	1.50-1.58
2.	Shear adhesion strength-28 days			
2a	Dry Condition	N/mm ²	1.5	1.80 - 1.88
2b	Heat ageing Condition	N/mm ²	1	1.46
2c	Wet Condition	N/mm ²	1	1.50
3.	Open time	Minutes	20	20
4.	Adjustable time	Minutes	15	15
5.	Slip resistance	mm	<0.5	0.35-0.40
6.	pot life	Hours	2	2
7.	Deformability	mm	> 5.0 mm	6.10



BLOCK BY BLOCK

It is ready to mix adhesive of carefully selected raw materials, Portland cement and graded aggregates and polymers. Designed for use with water to produce high bond strength/compressive strength/tensile strength mortar for laying aerated light weight concrete, fly ash bricks, cement hollow blocks, cellular concrete blocks or smoothing over the block work surface in layers of up to 12mm thickness that meet the requirements of National and International Standards.

FEATURES / ADVANTAGES

- Single component ready to mix and easy to use.
- Long working time.
- No curing required after block work is done.
- Improved adhesion between two blocks. High Bond strength, compressive and tensile strength.
- Fast and economical.
- No curing required.



DIRECTION FOR USE

SURFACE PREPARATION - Clean it thoroughly of dust, oil, and grease, ensure it is structurally sound and flat, and pre-wet the surface of the blocks to a touch-dry state. The surface preparation should also include checking for and addressing any voids, holes, or cracks before starting the application.

MIXING RATIO

- 3 parts of powder to 1 part water by volume. A common ratio is approximately 3:1 (powder to water by volume).

FIXING

- Apply Block by Bolck uniformly. After unit s placed apply Block by Block both sides with unifrom thicknees and continue mounting by checking linre and level.frimly pree the block fro good intial bonding.
- Excess material should be cleaned.

APPLICATION PROCEDURE:

- Layout the wall in which AAC Block Adhesive is to be used and mark openings like door, windows, any architectural appurtenances etc.
- Put a thin layer of AAC Block Adhesive in the thickness of 3mm to 5mm on the clean and leveled surface using proper trowel on which the block work is to be carried out.
- Place the block on the laid AAC Block Adhesive in proper line and level.
- After placing the first block apply the AAC Block Adhesive of same thickness on both the sides of the block continuously keeping a check on the line and level. Clean the excess material, if any immediately.
- Continue the procedure for the entire block work.

TECHNICAL SPECIFICATION

SL No.	Parameter	
1.	Color & Appearance	Grey
2.	Bulk Density	1.45 - 1.55g/cc
3.	Pot life	80 MIN
4.	Open time	50MIN
5.	Tensile adhesion strength-28 days	More then > 1mpa
6.	Compressive Strength - 28 days	More then > 5mpa
7.	Coverage	3.5-5kg/ sqm with 3mm bed thickness



TRUESET EPOXY

TWO PART HIGH STRONG TILES EPOXY GROUT

TRUESET EPOXY is a two part grouting material of highest quality that provides aesthetic effect and durability. It perfectly prevents stains, spillage, chemical attack in filled groove thicknesses of tiles and stones.

PART A Consists of a mixture of Epoxy resin, siliceous aggregates and additives.

PART B Consists of mixture of organic catalysts

FEATURES / ADVANTAGES



Stain free



Durable



Water & shock resistant



Anti-Fungal and Anti-Bacterial



Easy to clean



Traffic resistant



Uniform colour



Good flexural properties



Mild Chemical/acid & Temperature resistant



Low shrinkage



UNIFORM
FINISH



STRONG
BOND



CHEMICAL
RESISTANT



EASY TO
CLEAN



ENGINEER'S
CHOICE FOR
**PERFECT
FINISH**



PACKING DETAIL:
1KG & 5KG kit.



HYDROPROOF SBR

MULTIPURPOSE WATERPROOFING & BONDING SOLUTION

HYDROPROOF SBR is a multipurpose high end performance enhancer for mortar and cement slurry. It acts as waterproofing cum bonding agent for uses in repair and plastering mortars, waterproofing cement slurries, bond coats and multipurpose mortar admixture.

FEATURES / ADVANTAGES



Improves Concrete Properties



High Solid Content
Better Bonding



Higher Coverage
& Tackiness Time



Versatile for Multiple Applications



INSTRUCTIONS FOR USE:

HYDROPROOF SBR is a white dispersion must be added to clean water in the ratio as specified in the mixing instruction below



MIXING INSTRUCTIONS:

- ✓ **Waterproofing Slurry:** 1 part of HYDROPROOF SBR to be mixed with 3 parts of water and 6 parts of cement.
- ✓ **Bond Coat:** 1 part of HYDROPROOF SBR to be mixed with 3 parts of water and 4 parts of cement.
- ✓ **Repair & Plastering Mortar:** 1 liter of HYDROPROOF SBR to be mixed with 4 liter water, 10 kg cement and 40 kg sand.

TECHNICAL SPECIFICATION

SL No.	Parameter	Value
1.	Color & Appearance	Milky White
2.	Specific Gravity	Approx.1.02 gm/cc
3.	Solid Contents	34%
4.	pH Value	10.5-11.5
5.	Viscosity	120mpa
6.	Surface tension	App 50 mN/m



WATERPROOFING
PROTECTION



STRONG BOND
STRENGTH



ENHANCES DURABILITY
& PERFORMANCE



IDEAL FOR ROOFS,
WALLS & PLASTER



GROUT ADDITIVE

HYDROPROOF GT

Polymeric emulsion added to cementitious grout to enhance strength and durability of internal and external tile joints. This high performing acrylic latex additive enhances bonding strength, flexural strength, and durability.

FEATURES / ADVANTAGES



High Strength



Great Adhesion



Abrasion Resistant



Long Lasting Durability

PACKING DETAIL:

 200 ml.

TILE CLEANER

HYDROPROOF TILE CLEANER

- High-quality tile cleaner for cleaning of dirt and stains on tile surfaces in residential/commercial sites.
- Used as degreasing solution for use on mosaic, ceramic and vitrified tiles.

FEATURES / ADVANTAGES



Removes Tough Stains



Cleans Dirt & Grime



Rapid Action



Retains Tiles Glass

PACKING DETAIL:

 1ltr & 5ltr.



ENHANCES STRENGTH



IMPROVES BONDING



FOR INTERNAL & EXTERNAL TILE JOINTS



BUILT FOR DURABILITY



POWERFUL CLEANING



REMOVES DIRT & GRIME



FAST & EFFECTIVE



SAFE ON TILE SURFACES



PROFESSIONAL RESULTS



EASY TO USE



TRUSTED QUALITY



IDEAL FOR HOME & COMMERCIAL USE

GAPFILL GROUT

- ✓ Suitable for filling joints/gaps between the tiles in bathrooms, kitchens, internal and external floor and wall
- ✓ Polymer modified, sanded cement-based grout that is durable, hard and strong. This tile joint has super smooth consistency and is easier to apply and clean.

FEATURES / ADVANTAGES

-  Available in different colours
-  Low VOC
-  Easy to Clean
-  Uniformity in color
-  Non-shrinking and non-cracking

PACKING DETAIL:

1kg.



HYDROPROOF 2K

HydroProof 2K is used for Concrete foundations, basements wall and lift pits. Swimming pools, water tanks and reservoirs. Concealed roofs, parking decks, bathroom, toilet, kitchen, balconies and planters. Can be applied on damp surface

FEATURES / ADVANTAGES

-  Easy to apply.
-  Resistant to freezing/thawing cycles.
-  Abrasion resistant.
-  Non-toxic, suitable for potable water.
-  Excellent water resistance.
-  Enhanced crack bridging ability.

PACKING DETAIL:

3kg & 15 kg.



WATER
RESISTANT



DURABLE
PROTECTION




FOR INTERIOR &
EXTERIOR USE



TILES INSTALLATION EQUIPMENTS

— QUALITY TOOLS FOR PERFECT TILES —

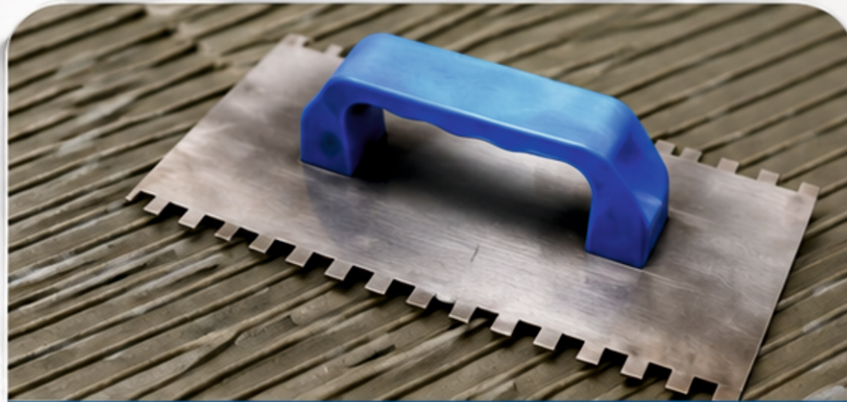

SS NOTCH TROWEL

Perfect Notches. Perfect Bond.



TILE SPACER

Even Gaps. Flawless Finish.



RUBBER HAMMER

Gentle Tap. Strong Fix.



VACUUM SUCTION CUP

Strong Grip. Safe Lift.

*Better Tools
Better Work
Better Results*



DURABLE
MATERIAL



PRECISE
PERFORMANCE



EASY
TO USE



PROFESSIONAL
RESULTS


EPOXY GROUT COLOURS



601 White



602 Cream



603 Ivory



604 Grey



605 Mashroom



606 Jaisalmer Yellow



607 Terra Cotta Red



608 Dark Brown



609 Dark Grey



610 Black



611 Baby Pink



612 Pink



613 Red



614 Wood Brown



615 Choco Brown



616 Burgundy




617 Purple



618 Walnut



619 Off White



620 Almond



621 Beige



622 Wheat Shine



623 Khakee



624 Copper Brown



625 Olive



626 Rust



627 Algos



628 Blue



629 Metal Grey



630 Steel Grey



631 Sea Green



632 Electric Blue



633 Dark Blue




634 Alpin Blue



635 Carbon Black



636 Zed Black



637 Mint



638 Lemon Yellow



639 Yellow



640 Sun Gold



641 Mustard Yellow



642 Light Green



643 Grass Green



644 Pine Green



645 Dark Green



MAXCREATE INDUSTRIES

Reg.address : 4/1/9 Naya pura, Behind New Siyaganj, Indore (M.P.)

Website : www.maxcreateindustries.com

Email : info@maxcreateindustries.com

Contact : 9302698066

Follow us on :   

